



关注官方微信 获取更多详情

伟马快德机电科技（上海）有限公司  
上海市松江区明南路85号8号楼，  
201613  
电话：+86/ (0)21/ 5774 0022  
传真：+86/ (0)21/ 5774 6601  
网址：www.werma.com  
邮箱：info@werma.com.cn

WERMA (Shanghai) Co., Ltd.  
Building 8, No. 85 Mingnan Road,  
Songjiang, Shanghai, P.R.C.  
201613  
Phone: +86/ (0)21/5774 0022  
Fax: +86/ (0)21/5774 6601  
www.werma.com  
info@werma.com.cn

## CST 55

|                                                |                                      |
|------------------------------------------------|--------------------------------------|
| Dimensions:                                    | 56.5mm × 300mm (with bracket)        |
|                                                | 56.5mm × 210mm (without bracket)     |
| Note: the diameter of the bracket base is 70mm |                                      |
| Voltage:                                       | 24V DC (Positive and negative logic) |
| Connection :                                   | Cable included                       |
| Light :                                        | LED permanent                        |
| Sound :                                        | Pulse                                |
| Life duration :                                | 50,000 hrs                           |

## CST 55 Signal Tower — Safe, Compact, Reliable



COMPLETE SET  
INCLUDING STANDARD  
MOUNTING BRACKET  
AND CABLE


360 ° STRONG  
VISIBILITY  
FROM ALL  
THE POSITION

CLEARLY  
IDENTIFY  
THE SIGNAL  
BY UP TO  
85 dB PULSE  
TONE

2-4 TIERS PLUS  
BUZZER AS OPTION  
MATCH MAJORITY  
APPLICATION

INDUSTRIAL  
DESIGN LOOK  
MATCH MODERN  
MACHINE  
APPEARANCE

The transparent dome and grey base of CST 55 make it suitable for any modern machine. The transparent dome can reduce the interference of ambient light, which not only improves the quality but guarantees production safety. CST 55 also adds a model including a complete set (standard mounting bracket and a cable), which can improve customer experience and reduce assembly time and cost.

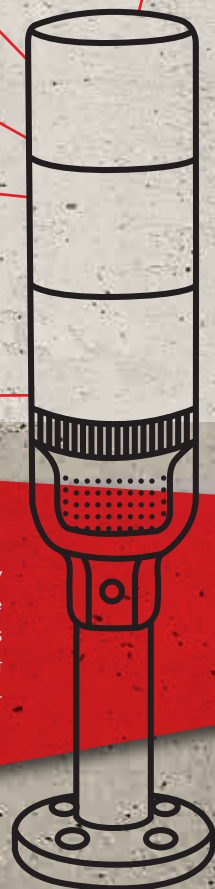

## CST 55 Signal Tower



### Order specifications:

#### Tube mounting with bracket

|             |            |
|-------------|------------|
| GN/YE/RD    | 659 110 55 |
| GN/RD       | 659 120 55 |
| BU/GN/YE/RD | 659 150 55 |

#### Tube mounting with bracket

|                    |            |
|--------------------|------------|
| GN/YE/RD/Buzzer    | 659 310 55 |
| GN/RD/Buzzer       | 659 320 55 |
| BU/GN/YE/RD/Buzzer | 659 350 55 |

#### Tube mounting without bracket

|             |            |
|-------------|------------|
| GN/YE/RD    | 659 210 55 |
| GN/RD       | 659 220 55 |
| BU/GN/YE/RD | 659 250 55 |

#### Tube mounting without bracket

|                    |            |
|--------------------|------------|
| GN/YE/RD/Buzzer    | 659 410 55 |
| GN/RD/Buzzer       | 659 420 55 |
| BU/GN/YE/RD/Buzzer | 659 450 55 |

### Accessories:

|                                                                                     |            |
|-------------------------------------------------------------------------------------|------------|
| Base with integrated tube<br>(Ø25mm, 110mm long, Plastic, incl. rubber seal)        | 960 009 16 |
| Tube with cable gland, Ø25mm                                                        |            |
| 100mm                                                                               | 975 849 10 |
| 250mm                                                                               | 975 849 25 |
| 400mm                                                                               | 975 849 40 |
| 800mm                                                                               | 975 849 80 |
| Base for tube mounting<br>(Ø25mm, plastic, incl. rubber seal)                       | 960 009 15 |
| Foldaway base for tube mounting<br>(Match Ø 25mm aluminium tube, incl. rubber seal) | 960 009 18 |

